


DMT345 and DMT346 Dewpoint Transmitters for High Temperature Applications

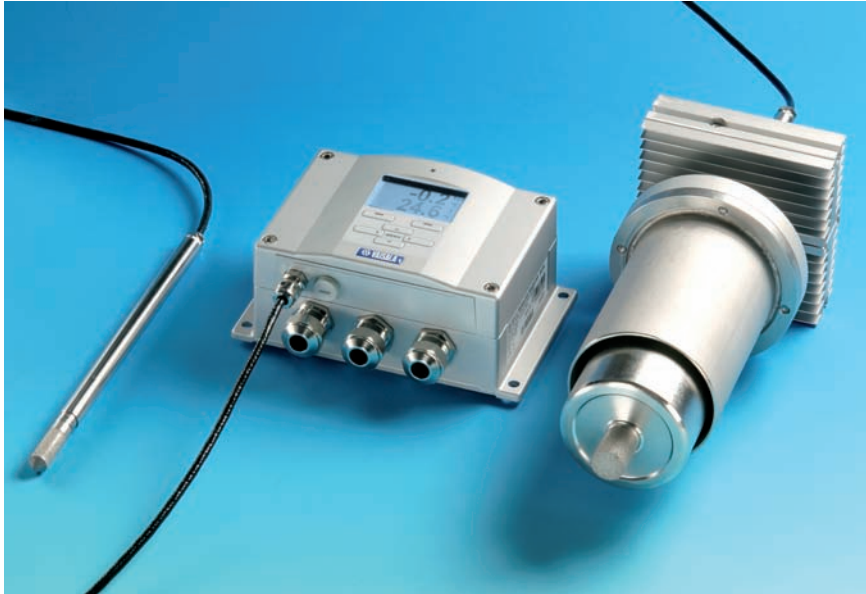

The Vaisala DRYCAP® Dewpoint Transmitters DMT345 and DMT346 are designed to measure and control humidity especially in dry environments with high temperatures.

The Vaisala DRYCAP® Dewpoint Transmitters DMT345 and DMT346 are designed for humidity measurement in industrial drying applications with particularly high temperatures.

Both transmitters incorporate the Vaisala DRYCAP® sensor, which is accurate, reliable, and stable. The sensor withstands condensation and is immune to particulate contamination, oil vapor and most chemicals. The DRYCAP® sensor stands out for its swift response time and rapid recovery after getting wet.

Measure humidity directly in hot processes

The DMT345 and DMT346 are constructed for direct measurement in hot processes. Therefore, there is no need for sampling systems and trace heating. As a result, high accuracy and constancy are maintained. The accuracy and stability of the DMT345 and the DMT346 are due to the unique auto-calibration function, patented by Vaisala. This auto-

calibration makes the transmitter perform a calibration and adjustment by itself while the measured process is running. If the measurement accuracy is not confirmed, corrections are made automatically. The procedure is so quick and corrections are so minor that it will go unnoticed. This ensures low maintenance and high performance. In normal conditions, it is recommended to have a traceable calibration performed once a year.

DMT345, Accurate in hot and dry environments

The DMT345 is designed for accurate humidity measurement in hot and dry conditions. This model provides unmatched dry end measurement accuracy in temperatures up to 140 °C, however the DMT345 can operate safely in temperatures up to 180 °C. The stainless steel probe is especially designed for high temperatures and has an optional installation flange that allows an adjustable installation depth and therefore a precise positioning.


Features/Benefits

- The DMT345 measures humidity in temperatures up to 180°C (356 °F)
- The DMT346 measures humidity in temperatures up to 350 °C (+662 °F)
- Dewpoint accuracy ± 2 °C (± 3.6 °F)
- Vaisala DRYCAP® Sensor provides accurate, reliable measurement with excellent long-term stability and fast response
- Withstands condensation
- Unique auto-calibration feature
- Optional local display with keypad, mains power supply module and alarm relays
- NIST traceable calibration (certificate included)
- Analog outputs, WLAN/LAN

DMT346, Reliable in very hot processes

When process temperatures range between 140 °C to 350 °C, the DMT346 provides the best measurement performance.

The DMT346 comes with a cooling set as a standard feature. The cooling effect may be regulated by adding the cooling fins, or removing them from the set for the best measurement performance. The cooling system operates without moving parts, additional power or cooling utilities, thereby eliminating

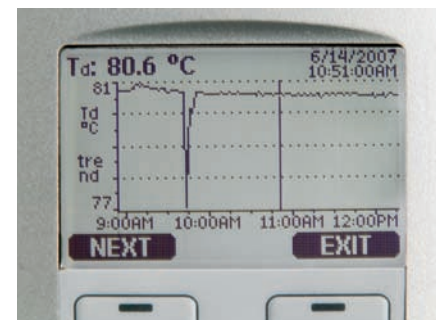

The large and clear display allows the user to check data at a glance.

the risk of sensor damage due to a mechanical cooling failure. Additionally, sensor warming minimizes the risk of condensing on the sensor. In low humidity the combination of auto-calibration and DRYCAP® ensures accurate measurement.

Graphical display

The DMT345 and DMT346 transmitters can be ordered with a large numerical and graphical display, which allows the user to clearly monitor operational

data, measurement trends and up to one-year measurement history. The optional data logger with real-time clock makes it possible to generate more than four years of the measured history and zoom in on any desired time or time frame.

Versatile outputs and (wireless) data collection

The transmitter can be connected to a network with an optional (W)LAN interface, which enables a (wireless) Ethernet connection.

For serial interface also the USB connection, RS232 and RS485 can be used. Additionally an alarm relay option is available.


The transmitter can have up to three analog outputs. Galvanic isolation of supply power and analog outputs are also offered. The recorded measurement data can be viewed on the display or transferred to a PC with Microsoft Windows® software

Units are delivered installation-ready and meet ROHS requirements.

Technical Data

Measured variables DMT345

Dewpoint DMT345
 Sensor Vaisala DRYCAP®180S
 Measurement range -40 ... +100 °C (-40 ... +212 °F) Td
 Accuracy ±2°C (±3.6 °F) Td
 See the accuracy graph below

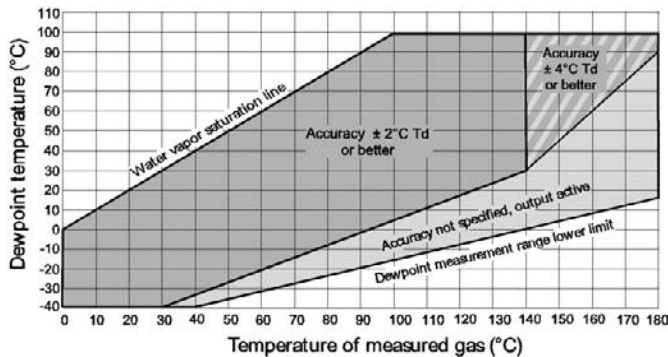

Dewpoint accuracy vs. measurement conditions
 Response time 63% [90%] flow rate 1 l/min and 1 bar pressure
 from dry to wet 5s [10 s]
 from wet to dry including auto-calibration 45s [5 min]


Temperature DMT345
 Measurement range 0 ... +180 °C (+32 ... +356°F)
 with sensor warming upper range limited by humidity (at 80% RH warming is switched on and T reading not actual process Temperature)
 Accuracy ±0.4 °C at 100 °C
 Temperature sensor Pt 100 IEC 751 1/3 class B

Relative Humidity DMT345
 Measurement range 0 ... 100% RH
 with sensor warming 0 ... 80% RH
 Accuracy below 10% RH ±10% of reading
 above 10% RH ±1,5% RH + 1,5% of reading

Mixing Ratio DMT345
 Measurement range (typical) 0 ... 1000 g/kg (0 ... 7000 gr/lbs)
 Accuracy (typical) ±12% of reading

Measured variables DMT346


Dewpoint DMT346
 Sensor Vaisala DRYCAP®180S
 Measurement range -25 ... +100 °C (-13 ... +212 °F) Td
 Accuracy ±2°C (±3.6 °F) Td
 See the accuracy graph below

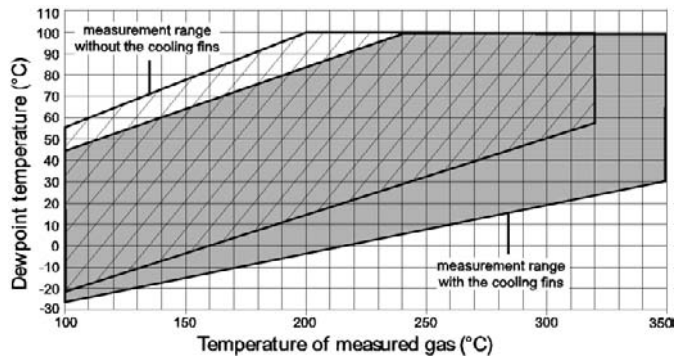

Dewpoint accuracy vs. measurement conditions
 Response time 63% [90%] flow rate 1 l/min and 1 bar pressure
 from dry to wet 5s [10 s]
 from wet to dry including auto-calibration 45s [5 min]

Mixing Ratio DMT346
 Measurement range (typical) 0 ... 1000 g/kg (0 ... 7000 gr/lbs)
 Accuracy (typical) ±12% of reading

Vaisala products for humidity measurement in hot processes

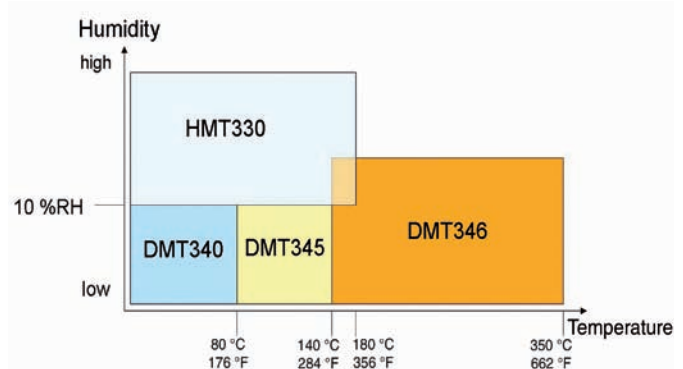

Technical Data

Operating Environment, both models

Mechanical durability of probes	Up to +180 °C (+356 °F) for DMT345 Up to +350 °C (+662 °F) for DMT346
for transmitter body	-40 ... +60 °C (-40 ... +140 °F)
with display	0 ... +60 °C (32 ... +140 °F)
Storage temperature range	-55 ... +80 °C (-67 ... +176 °F)

Pressure range for probes slight pressure difference (~ 200 mbar)
 Measured gases non corrosive gases
 Complies with EMC standard EN61326-1, Electrical equipment for measurement, control and laboratory use - EMC requirements; Industrial environment.

Inputs and outputs, both models

Operating voltage	10 ... 35 VDC, 24 VAC
with optional power supply module	100 ... 240 VAC 50/60 Hz
Default start-up time	
initial reading after power-up	3 s
full operation after sensor Purge and Autocal	about 6 min
Power consumption @ 20 °C (U _{in} 24 VDC)	
U _{out} 2x0 ... 1V/0 ... 5V/0 ... 10V	max 25 mA
I _{out} 2x0 ... 20mA	max 60 mA
RS-232	max 25 mA
display and backlight	+ 20 mA
during sensor purge	+ 110 mA max

Analog outputs	(2 standard, 3rd optional)
current output	0 ... 20 mA, 4 ... 20 mA
voltage output	0 ... 1 V, 0 ... 5 V, 0 ... 10 V

Accuracy of analog outputs at 20 °C	± 0.05 % full scal
Temperature dependence of the analog outputs	± 0.005 %/°C full scale

External loads	
current outputs	R _L < 500 ohm
0 ... 1V output	R _L > 2 kohm
0 ... 5V and 0 ... 10V outputs	R _L > 10 kohm
Max wire size	0.5 mm2 (AWG 20) stranded wires recommended

Digital outputs	RS-232, RS-485 (optional)
Service connection	RS-232, USB
Relay outputs 2+2 pcs (optional)	0.5 A, 250 VAC, SPDT

Ethernet interface (optional)	
Supported standards	10/100Base-T
Connector	RJ45
Protocols	Telnet
Software support	Vaisala MI70 link

WLAN interface (optional)	
Supported standards	802.11b, 802.11g
Antenna connector type	RP-SMA
Protocols	Telnet
Security	WEP 64/128,WPA
Software support	Vaisala MI70 link

Authentication / Encryption	
Open / no encryption	
Open / WEP	
WPA Pre shared key / TKIP	
WPA Pre shared key / CCMP (a.k.a. WPA2)	

Optional data logger with real-time clock	
Logged parameters	max. three with trend/min/max values
Logging interval	10 sec (fixed)
Max. logging period	4 years 5 months
Logged points	13,7 million points per parameter
Battery lifetime	min. 5 years

Display (optional)	LCD with backlight, graphic trend display
Display menu languages	English, French, Spanish, Chinese, German, Japanese, Russian, Swedish, Finnish


Mechanics, both models

Cable bushing	M20x1.5 For cable diameter 8 ... 11mm/0.31 ... 0.43"
Conduit fitting (optional)	1/2"NPT
User cable connector (optional) option 1	M12 series 8- pin (male) with plug (female) with 5 m / 16.4 ft black cable
option 2	with plug (female) with screw terminals
USB-RJ45 Serial Connection Cable	part. no 219685
Probe cable diameter	5.5 mm
Probe cable length	2 m, 5 m or 10 m
Housing material	G-AlSi 10 Mg (DIN 1725)
Housing classification	IP 65 (NEMA 4X)
Housing weight	1.2 kg

Dimensions

Dimensions in mm (inches)

DMT345 and DMT346 Transmitter housing

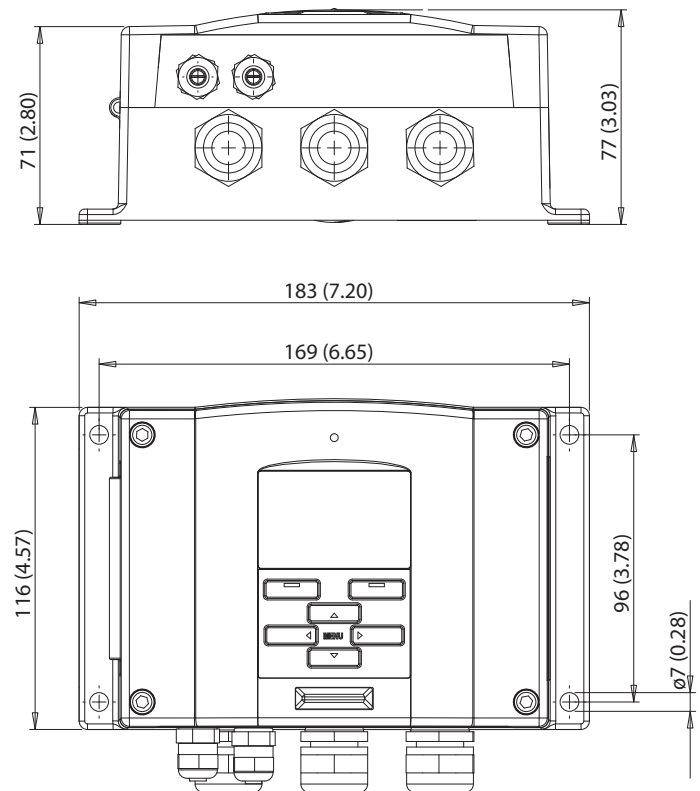


Technical Data


Dimensions

Dimensions in mm (inches)

DMT345 probe and mounting flange

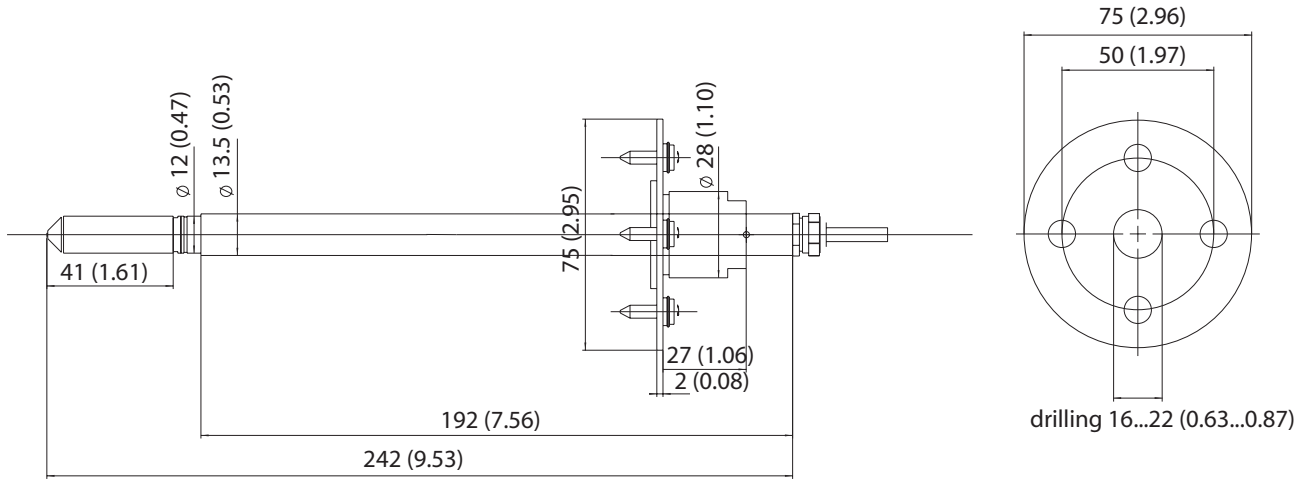

DMT346 Cooling set

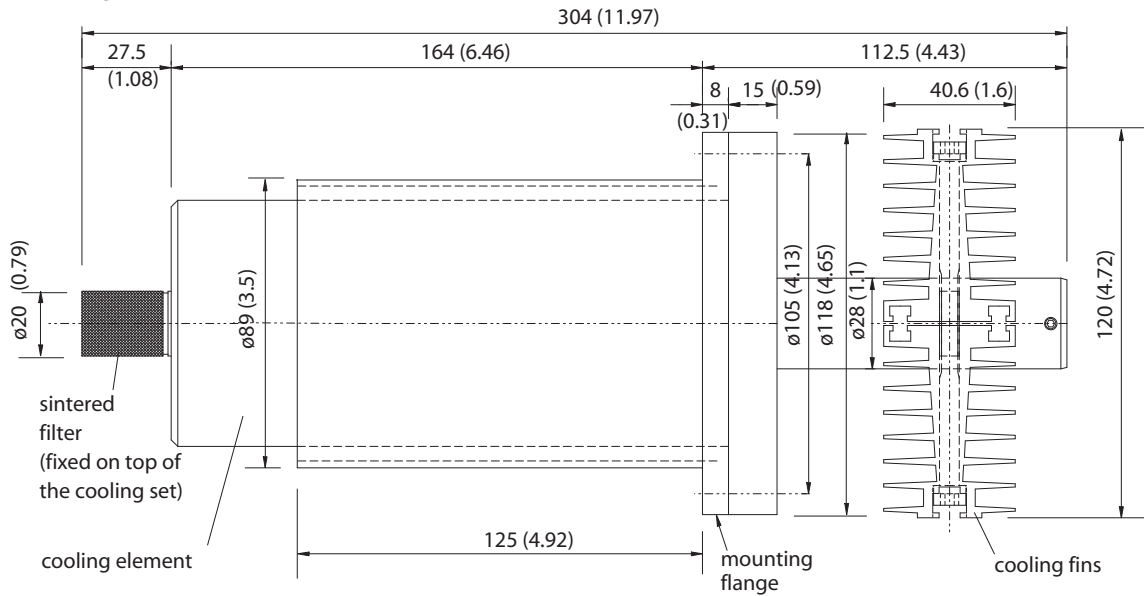

DMT346 Probe

