

# VIRALERT 2

HUMAN BODY TEMPERATURE  
MEASUREMENT SYSTEM



30 to 45°C / 86 to 113°F



# vIRALERT 2

HUMAN BODY TEMPERATURE MEASUREMENT SYSTEM

**AMETEK LAND HAS BEEN MANUFACTURING PRECISION MEASURING EQUIPMENT SINCE 1947.**

We are specialists in non-contact temperature measurement and combustion monitoring with applications across diverse industries such as steel and glass making, power generation and cement manufacture.

As part of AMETEK Process & Analytical Instruments Division since 2006, our customers benefit from the worldwide AMETEK sales and service team.

**In a world where global travel means infections can pass through populations fast, the ability to screen people for fever is a key tool in reducing the risk of disease spread.**

The vIRAlert 2 fixed temperature monitoring system provides remote measurement of human body temperature (typically the face) to an accuracy of within 0.5 °C enabling the detection of the small changes in temperature induced by a fever.

Most economical thermal imagers can only achieve accuracy to within 2 °C which is not adequate to detect a fever. However, by calibrating an imager in real time against a precise blackbody calibration source the vIRAlert 2 system can provide accurate and reliable skin temperature measurement for the



screening of personnel at point of entry to areas like airports, train stations, key operational facilities and factories and other places where infectious diseases can easily spread.

Using simple and intuitive software, this point-of-entry system provides automatic on-screen and audible alarms to alert the operator so that early action can be taken to protect the premises against the risk of spreading the infection.

A typical detection distance of 1 metre, provides a field of view of 70 x 55 cm so that checks can be made without any contact with the operator.

**The vIRAlert 2 is AMETEK Land's accurate thermal imaging system for human body temperature measurement.**

## THERMAL MONITORING ▼

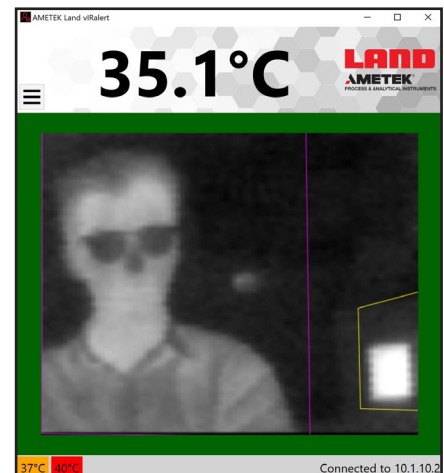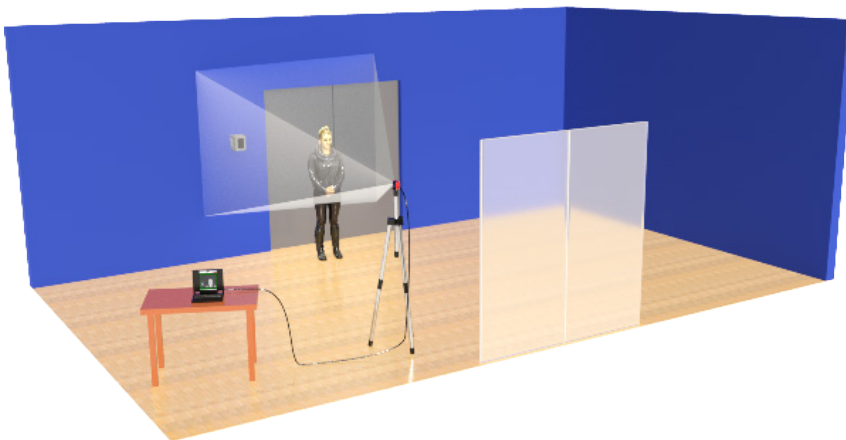

# SPECIFICATION & DESIGN



## 1: THERMAL IMAGING CAMERA

Continuously measuring 30 to 45 °C / 86 to 113 °F, with a 39 x 31° field of view and 80 x 64 resolution gives 5,210 temperature data points per frame, at a rate of 9 Hz.

## 2: CERTIFIED BLACKBODY HEAT SOURCE

Providing a trusted reference temperature value calibrated at 38 °C / 100.4 °F for the thermal imaging camera with a large plate for viewing at longer distances.

## 3: CONNECTING CABLES

Ethernet and Power between camera and laptop (5 m / 15 ft).

## 4: FLEXIBLE MOUNTINGS

Camera supplied with wall mounting bracket and standard 1/4-20 UNC thread for use with alternative mounting options. Wall mounting lugs on calibration source enable easy fitting with wall hooks.

## 5: SCREENING SOFTWARE

Continuous or still image showing normal temperature in black and white with abnormally high temperatures in red. On screen and audio alarm triggered if potential fever detected. Supply of Windows 10 laptop for running software is optional.

## 6: CALIBRATION

Each system is calibrated at our ISO17025 accredited facility in the UK.


## KEY APPLICATIONS

**TRANSPORT AND TRAVEL** - Airports, Railway Stations, Subways, Underground Rail Systems, Large Public Buildings

**EDUCATION** - Schools, Colleges, Universities, Municipal Libraries

**BUSINESS** - Manufacturing Facilities, Warehouses, Offices, Government Buildings.

## SYSTEM OVERVIEW

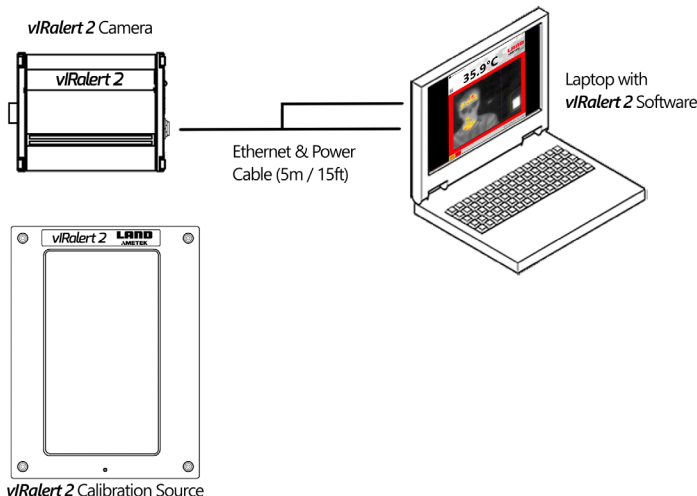

## KEY BENEFITS

**Instant non-intrusive measurement** using infrared thermal imaging technology with market-lead temperature measurement accuracy.

**Monitors for high temperature** without slowing down the flow of people.

**Fixed remote measurement** removes the risk of infection transmission to operators.

**Complete On-line System Solution** works out of the box and is simple to operate.

**Quick and easy to install and re-locate** as required with standard camera fitting for flexible mounting options.

**Automatic alert function** reduces potential for human error and immediately alerts the operator if trigger point reached.

# VIRALERT 2

HUMAN BODY TEMPERATURE  
MEASUREMENT SYSTEM

## SPECIFICATIONS

### SYSTEM

**Accuracy:** +/- 0.5 °C (at a distance of 1m)

### CAMERA

**Measurement Range:** 30 to 45 °C / 86 to 113 °F

**Detector Array Format:** 80 x 64 pixels

**Detector:** Uncooled Thermopile Array

**Spectral Response:** 8 to 14 µm

**Frame Frequency:** 9 Hz

**Temperature Resolution:** < 0.12 °C

**Field of View:** 39 x 31°

**Power Supply Requirement:** 5 VDC (USB) from computer

**Interfaces:** Wired Ethernet

**Image Processing Software:** Continuous or still image display showing normal temperature in black and white with abnormally high temperatures in red. On screen and audio alarm triggered if potential fever detected.

**Operating Temperature Range:** 10 to 50 °C / 50 to 122 °F

### BLACKBODY HEAT SOURCE

**Temperature:** 38 °C / 100.4 °F

**Emissivity:** 0.97

**Target Size:** 80 x 120 mm

**Combined Accuracy / Stability:** +/- 0.2 °C (+/-0.3 °F)

**Power Supply Requirement:** 100-240 VAC, 2A (Supplied with 12 VDC power adaptor)

**Operating Temperature Range:** 10 to 50 °C / 50 to 122 °F




AMETEK Land's AMECare Performance Services ensure peak performance and maximum return on investment over the life of your equipment.

We will deliver this by:

- Proactively maintaining your equipment to maximize availability.
- Optimizing solutions to meet your unique applications.
- Enhancing user skills by providing access to product and application experts.

AMETEK Land's global service network provides unparalleled after-sales services to ensure you get the best performance and value from your AMETEK Land products. Our dedicated service centre teams and on-site engineers are trained to deliver the highest standard of commissioning, maintenance and after-sales support.

**vIRAlert 2 IS AMETEK LAND'S ACCURATE  
THERMAL IMAGING SYSTEM FOR  
HUMAN BODY TEMPERATURE MEASUREMENT.  
WWW.AMETEK-LAND.COM**



### CONTACT US



[www.ametek-land.com](http://www.ametek-land.com)



[land.enquiry@ametek.com](mailto:land.enquiry@ametek.com)



Certificate No. CC-2041  
APPLIES IN INDIA



APPLIES IN THE UK



APPLIES IN THE US